

4

3

2

1





### END INLET, END OUTLET CONFIGURATION

#### 3" NPT CONNECTIONS



INDUSTRIAL					RESIDENTIAL					CRITICAL					HOSPITAL						
P/N	A	B	D	WGT	P/N	A	B	D	WGT	P/N	A	B	D	WGT	P/N	A	B	D	WGT		
C062096	3	8	25	20	C06530	3	NOT AVAILABLE				C06516	3	NOT AVAILABLE				C06718	3	NOT AVAILABLE		

#### 4" - 10" 150# ANSI FLANGE

INDUSTRIAL					RESIDENTIAL					CRITICAL					HOSPITAL				
P/N	A	B	D	WGT	P/N	A	B	D	WGT	P/N	A	B	D	WGT	P/N	A	B	D	WGT
C062079	4	8	32.5	50	C06532	4	10	44.0	61	C06518	4	10	56.0	83	C06720	4	14	60.0	111
C062080	5	10	44.0	74	C06533	5	12	56.0	91	C06519	5	12	68.0	117	C06721	5	18	68.0	176
C062081	6	12	44.0	82	C06534	6	12	56.0	98	C06520	6	12	68.0	131	C06722	6	18	68.0	184
C062082	8	20	62.5	156	C06535	8	18	68.0	177	C06521	8	18	92.0	235	C06723	8	26	96.0	394
C06548	10	22	72.0	238	C06536	10	22	84.0	284	C06522	10	22	108.0	342	C06724	10	30	110.0	696

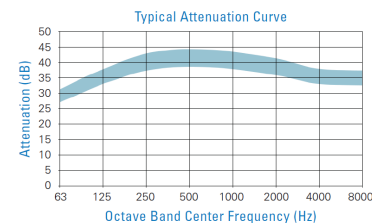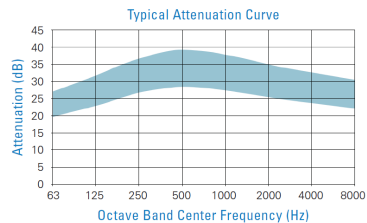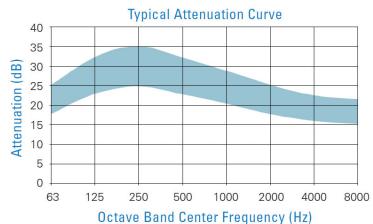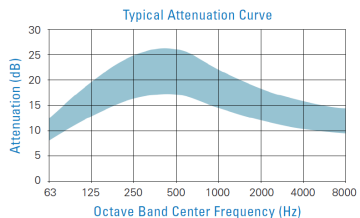

DIMENSIONS ARE IN INCHES

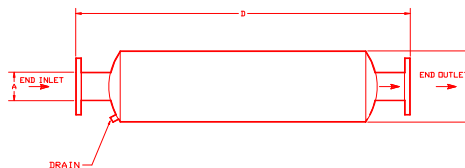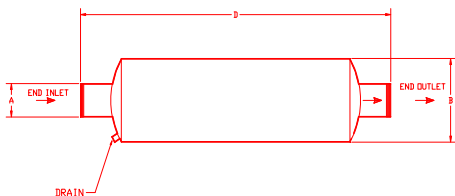

#### NOTES:

- DUAL SHELL DESIGN TO ELIMINATE SHELL RADIATED NOISE AND INCREASE DURABILITY.
- CARBON STEEL CONSTRUCTION.
- COATED WITH SATIN BLACK PAINT RATED TO 1200°F
- CONNECTIONS:
  - MALE NPT ON 3.0" ONLY
  - 125/150# ANSI FLANGES
- EQUIPPED WITH PORT PLUGGED DRAIN.
- ALL WELDED CONSTRUCTION.

REV	DESCRIPTION	ECN#	DWN	APVD	DATE
L	UPDATED INFORMATION FOR INDUSTRIAL SILENCERS	5839	JCA	JCA	16SEP22
M	UPDATED SILENCER DIM & WEIGHT FOR SILENCER C06734 - PAGE 2	6741	JCA	JCA	16MAR23
-	UPDATED CALLOUT FOR 4-10" WAS NPT IN ERROR - PAGE 1	N/A	JCA	JCA	05APR23
N	UPDATES TO PAGE 1 TABLE	5839	JCA	JCA	19APR23

<small>THIS DRAWING AND THE INFORMATION HEREON ARE OUR PROPERTY AND MAY BE USED BY OTHERS ONLY AS AUTHORIZED BY US. UNPUBLISHED - ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>		<input type="checkbox"/> ISSUED <input checked="" type="checkbox"/> CONTROLLED DRAWING	<h1>CLARKE</h1> <i>Fire Protection Products, Inc.</i>
DRWN: DMPOTTER DATE: 7/22/1992 ENGR: DMPOTTER	NAME: SILENCER, EXHAUST (END INLET, END OUTLET) & (SIDE INLET, END OUTLET)		
MATERIAL: SEE NOTES ASSEMBLY: SILENCERS SIMILAR TO: N/A	PART NO: D451		REV: N
SCALE: NTS UNITS: MM [INCH]		PAGE 1 OF 2	

4

3

2

1





## SIDE INLET, END OUTLET CONFIGURATION

### 2" - 3.5" NPT CONNECTIONS



INDUSTRIAL					RESIDENTIAL					CRITICAL					HOSPITAL				
P/N	A	B	D	WGT	P/N	A	B	D	WGT	P/N	A	B	D	WGT	P/N	A	B	D	WGT
C06582	3	NOT AVAILABLE			C06570	3	8	29.0	32	C06556	3	8	40.6	45	C06732	3	12	42.5	70

### 4" - 12" 150# ANSI FLANGE

INDUSTRIAL					RESIDENTIAL					CRITICAL					HOSPITAL				
P/N	A	B	D	WGT	P/N	A	B	D	WGT	P/N	A	B	D	WGT	P/N	A	B	D	WGT
C06584	4	10	29.5	45	C06572	4	10	41.5	61	C06558	4	10	53.5	83	C06734	4	14	56.0	122
C06585	5	12	41.6	687	C06573	5	12	54.0	91	C06559	5	12	65.6	117	C06735	5	18	66.5	176
C06586	6	12	41.6	74	C06574	6	12	54.0	98	C06560	6	12	65.6	131	C06736	6	18	66.5	184
C06587	8	18	54.5	142	C06575	8	18	66.5	177	C06561	8	18	90.5	235	C06737	8	26	93.5	394
C06588	10	22	69.0	217	C06576	10	22	81.0	284	C06562	10	22	105.0	342	C06738	10	30	108.0	696

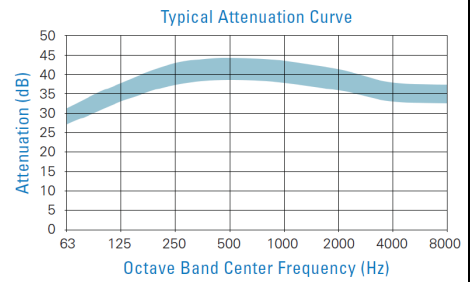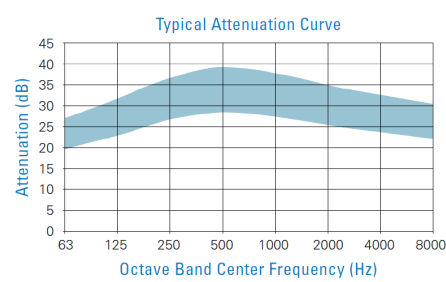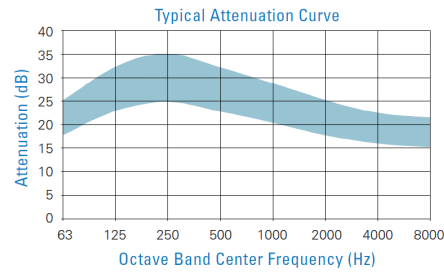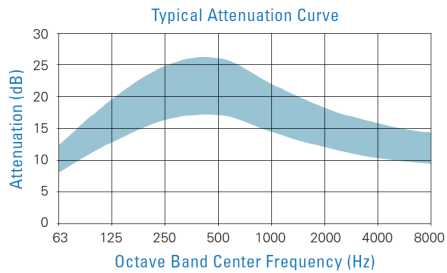

DIMENSIONS ARE IN INCHES

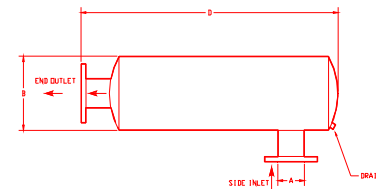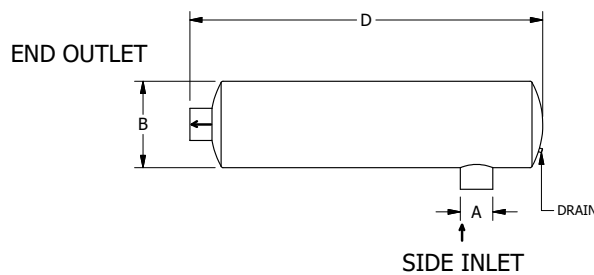

**NOTES:**

1. DUAL SHELL DESIGN TO ELIMINATE SHELL RADIATED NOISE AND INCREASE DURABILITY.
2. CARBON STEEL CONSTRUCTION.
3. COATED WITH SATIN BLACK PAINT RATED TO 1200°F
4. CONNECTIONS:
  - MALE NPT ON 3.0" ONLY
  - 125/150# ANSI FLANGES
5. EQUIPPED WITH PORT PLUGGED DRAIN.
6. ALL WELDED CONSTRUCTION.

THIS DRAWING AND THE INFORMATION HEREON ARE OUR PROPERTY AND MAY BE USED BY OTHERS ONLY AS AUTHORIZED BY US. UNPUBLISHED - ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.		 CONTROLLED DRAWING	<h1 style="margin: 0;">CLARKE</h1> <p style="margin: 0; font-size: small;">Fire Protection Products, Inc.</p>
DRWN: DMPOTTER	DATE: 7/22/1992	NAME: SILENCER, EXHAUST (END INLET, END OUTLET) & (SIDE INLET, END OUTLET)	
ENGR: DMPOTTER	MATERIAL: SEE NOTES	PART NO: D451	REV: N
FABRICATION TOLERANCE:	ASSEMBLY: SILENCERS	SCALE: NTS	UNITS: MM [INCH]
DECIMAL: ±0.003 FRACTIONAL: ±0.005 HOLE: ±0.010 ANGULAR: ±1/2°	SIMILAR TO: N/A	MM [INCH]	PAGE 2 OF 2